


Next Generation Firewall 100 Series

For stores and branch offices, 1.5 Gbps throughput

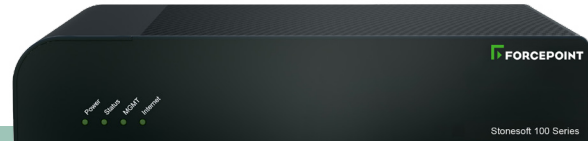

Remote offices, branches and stores can connect directly to the cloud easily and affordably with Forcepoint NGFW 100 Series. It integrates full SD-WAN connectivity and strong security in a compact, desktop appliance that's managed at enterprise scale from Forcepoint's renowned Security Management Console (SMC).

Key features

- Compact desktop form factor
- Multi-ISP SD-WAN and site-to-site Multi-Link™ VPN connectivity
- Industry's most secure NGFW with anti-evasion IPS
- Integrated configurable switch
- Accelerated inspection of encrypted traffic
- Zero-touch deployment
- Access and security policy updates with just a few clicks
- Centralized management for up to 2,000 appliances from one pane-of-glass
- Integration with Forcepoint Web Security Cloud and CASB
- Optional Wi-Fi (NGFW N115)
- Optional Advanced Malware Detection sandboxing
- Optional URL Filtering powered by Forcepoint ThreatSeeker

Direct-to-cloud connectivity and security for digital transformation

Digital transformation is all about connecting distributed workforces to the resources they need, no matter where they are. With applications and data moving to the cloud, organizations are increasingly finding that old "hub-and-spoke" networking technologies such as MPLS can no longer handle the load.

The Forcepoint NGFW 100 Series provides the networking and security needed to safely connect stores, branches, and remote offices directly to the Internet for maximum performance and productivity using the cloud.


Reduced costs and footprint with integrated SD-WAN and NGFW

The Forcepoint NGFW 100 Series unites networking and security in a compact desktop appliance that is easy to install in even the smallest locations. It integrates multi-ISP SD-WAN connectivity and site-to-site Multi-Link™ VPN with the industry's strongest next-generation firewall (NGFW) and intrusion prevention (IPS) security*.


It is centrally administered using the same Forcepoint Security Management Center (SMC) that controls up to 2000 physical, virtual and cloud appliances from a single pane of glass. With zero-touch deployment, Forcepoint NGFW devices throughout the world can be deployed quickly, without an on-site technician, and SMC enables access and security policies can be updated with just a few clicks.

*Top security effectiveness score for three years in a row in NSS Labs NGFW Group Test

Forcepoint NGFW N110 Appliance

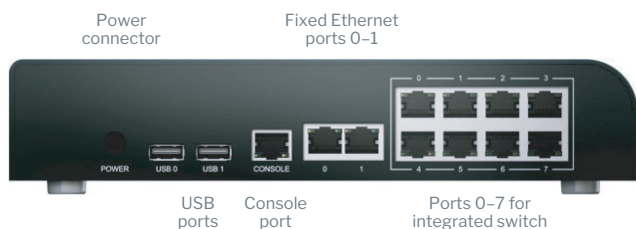

Forcepoint NGFW N115 Appliance

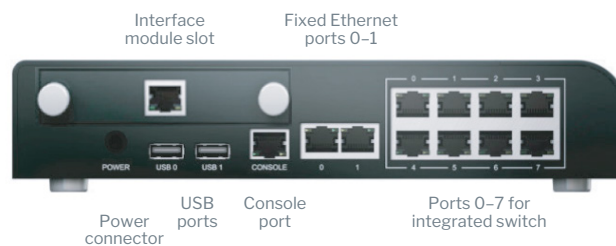

PERFORMANCE ¹	N110 & N115
NGFW/NGIPS throughput (HTTP 21kB payload)	150 Mbps
Max firewall throughput UDP 1518 byte	1.5 Gbps
Max inspection throughput UDP 1518 byte	400 Mbps
TLS 1.2 inspection performance (HTTP 21kB payload)	80 Mbps
IPsec VPN throughput AES-GCM-256	600 Mbps
Concurrent IPsec VPN tunnels	2,000
Mobile VPN clients	Max 25
Concurrent inspected TCP connections	100,000
Max number of concurrent inspected HTTP connections	23,000
VLAN tagging	Unlimited ²

¹ Performance values reflect maximums measured under test conditions and may vary based on configuration and features enabled

² Tagging is not available with switch ports

ORDERING	N110 & N115
Forcepoint NGFW 110 Appliance	N110
Forcepoint NGFW 115 Appliance	N115
URL Filtering for NGFW 110 and 115	FPURL1X
Advanced Malware Detection for NGFW 110 and 115	FPAMD1X
4 port GbE mini module ^{3,4}	MMGE4
2 port GbE SFP mini module ^{3,4}	MMGE2SFP
100 Series AC power supply	ACP110
4 GB spare part fast SSD (SLC)	ACM4

³ Supported only for N115 Appliance

⁴ See NGFW Module Datasheet for details on modules and supported SFPs

PHYSICAL	N110	N115
Form factor	Desktop	
Dimensions W x H x D	242 x 55 x 198 mm 9.52 x 2.17 x 7.80 in	
Net weight without modules	1.1 kg 2.43 lbs	1.2 kg 2.65 lbs
AC power supply	100 - 240 VAC 50-60 Hz, 36 W	
Typical power consumption	15 W	18 W
Max power consumption	32 W	38 W
Max BTU/Hour	109	130
MTBF	120,000 hours	
Operating temperature	5° - 40° C, 41° - 104° F	
Storage temperature	-20° - 70° C, -4° - 158° F	
Relative humidity non-condensing	10% - 90%	
Safety certifications	CB, UL/EN60950	
EMI certifications	FCC Part 15, CE, EN55022, EN55024	

NETWORK INTERFACES	N110	N115
Fixed Ethernet interfaces	10x GE RJ45	
Gigabit Ethernet - copper ports	10	10-14
Wi-Fi capability	IEEE 802.11 ac/a/b/g/n	
Network I/O slots	1 mini module	
Connectors	2x USB, 1x serial	

Contact: forcepoint.com/contact